

HDLA HD EXPANDOLINK SPECIFICATIONS

VIDEO

Sony MVS 8000, 4 ME, 80 input Switcher
8 Channels DME
73 Monitor Production Wall
3 position production deck
2 position back deck
(6) AJA Frame Syncs 1 UDX w/Audio
(16) Evertz 7711UDX HD/SD FS Upconverters w/Full Color Correction

CAMERAS & SUPPORT

(5) Sony HDC 1550 Triax/5 HDCU 1500
(2) Sony HDC 1000LW Triax/1 HDCU 1500
(2) Canon 18x1 Eng Lenses
(2) Canon 20x8.5 Eng Lenses
(1) Fujinon HD 66x lens
(1) Canon SD 55x lens
(2) Canon SD 70x lens

TAPE/SERVERS

(1) EVS 6 Channel XT (2) HD LSM Server Available
(1) X-file XF(2) Sate-ide Digital Archiving System Mainframe
(2) Sony HDW-S2000 HD cam decks- records 1080i only
w/Betacam, SX & SP Legacy Playback
(1) Digibeta Deck
(1) Beta SP Deck
(2) DNF Controllers for all tape decks
5 Additional open VT slots
Wired for Four 6 channel EVS Servers and 8 VTR's*
* Per Client Specification

GRAPHICS

Dual channel Chyron Duet HyperX2 HD/SDI Graphics
Dual Quad Core Xeons @ 2.66Mhz, 8800 GTS Graphics
Processor, 2 GB Ram, Two 600 GB striped I: and J:
Message/Clyps Drives, Lyric Version 5.25, 6.14, Lyric PRO,
2 Clyp Players, SD/HD Switchable w/EFX Panels,
Duet Style Keyboard
Wired for 2 channel score box
Wired for 2 channel Telestrator

AUDIO/COMMUNICATIONS

Calrec Zeta, 40 Fader w/TFT Metering
64 AES I/O
1 MADI I/O Port Available
96 Mic/Line in
32 Line outputs
DK audio MSD600M++ Meter
Genelec 5.1 Monitoring
RTS/Telex Adam CS 64 Port Intercom
KP 32, MKP 950 Panels

AUDIO/COMMUNICATIONS (cont.)

8 Channels Adam IFB
2 Studio Tech Model 41 IFB
KP 32, MKP 950 Panels
32 Adam ports at Patch
2 RTS/Telex Tiff 2000a Telephone interfaces
2 JK Audio Inkeeper 4 Phone Hybrids (8 total interfaces)
12 Channel 2 wire SAP
3 Studio Tech Model 46 2 w/4 wire interfaces
16 Line Avaya/Lucent Phone system
1 Riedel dual two way radio intercom interface
Dolby DP 571 Dolby E Encoder
Dolby DP 572 Dolby E Decoder

AUDIO SUPPORT

(7) Sennheiser HMD 25-XQ Sportscaster Headsets
(6) RTS Telex PH-88R5 Single Sided Headset w/Flex Boom
(8) RTS Telex BP325 Headset Stations (Beltpacks)
(10) Beyer Dynamic DT-109 Double Muff Headsets
(10) Beyer Dynamic 5 foot cords w/5 pin
(12) RTS Telex PH-88 Headsets
(10) RTS Telex 4030 IFB Beltpacks
(1) Digicart II+ with 250 zip
(1) Digicart II+ with 1000 zip

MONITORING

All Monitoring is HD/SD compatible (auto-sensing)
Production Room:
3 Marshall V-R201P-AFHD
16 Marshall V-R1042-IMD-TE4U (Dual for 32 total)
Video:
2 Marshall V-R201P-AFHD (split screen capabilities)
Tape Room:
2 Marshall V-R201P-AFHD
8 Marshall V-R1042-IMD-TE4U (Dual for 16 total)
Graphics Station(s):
3 Marshall V-R201P-AFHD
2 Marshall V-R1042-IMD-TE4U (Dual for 4 total)
4 Marshall V-R65P-HD (Dual for 8 total)
EVS Station(s):
2 Marshall V-R201P-AFHD
4 Marshall V-R65P-HD (Dual for 8 total)

TERMINAL

Pesa 3500 Pro Control and Panels
Nvision 8288 3 Gig HD/SD Video Router
252x288
Nvision 7512 TDM Audio Router
192x256 AES
96x80 Analog
32x32 MADI
(1) Harris/Videotek TVM 950-E w/EYE and Dolby E options
(2) Leader 5750 Multi Standard Scopes

HD/SD DIGITAL UPLINK

1 VertexRSI 2.4 Meter SM-Lt Ku Band Antenna
(2) Tiernan HE4000 HD/SD Encoders
(1) Tiernan HE4040 HD/SD
(2) Miteq Upconverters


ALSO AVAILABLE

(1) Sony XDCam HD PDW-F1600
(2) Fish Pole Mics
Additional Cameras, Lenses, VTR's, Mics, Monitors and
other equipment available upon request

TRUCK SPECIFICATIONS

Overall Length: Length - 40', Width - 8.5', Height - 13.4'
Operational Footprint: Length - 40', Width - 12.5',
Height 24.4 (w/antenna deployed)
Expanding Side: 15' in length (6' from side)
Combination Weight: GVWR 54,000 lbs
Power Requirements: 200 Amp, Single Phase, 208-240 Volt
On Board Generator: 20kW Kohler (for set up only)
A/C: Dual 48,000 BTU units for redundancy

* Specification subject to change without notice.

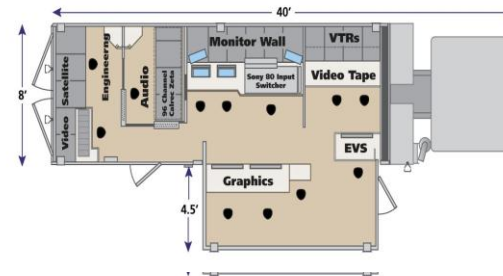

* seats approximately 12 crew personnel
last revision 11/05/10